

Onderwerp
Start pouring concrete

Dear Ms, Mr,

I hereby inform you about the start of concreting of the underground bicycle storage of the Koningin Julianaplein.

Concreting of the underground bicycle storage

The building pit of the bicycle storage facility will be excavated and concreted in two phases (see figure 1). Phase 1 is the workspace at the Bezuidenhoutseweg. The excavation of this phase started in October. Following the excavation, the walls, floors and decks of the building pit are poured. The concrete pouring of phase 1 is started during November and lasts until March 2018.

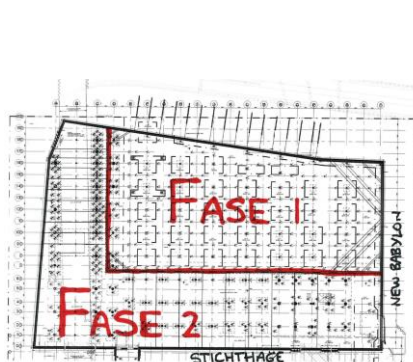


Figure 1. Oversight the Phases

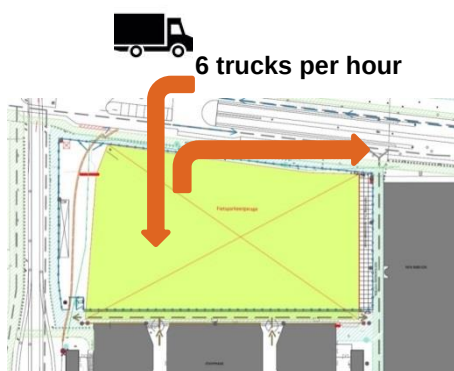


Figure 2 Traffic

For the floors and decks, between 500-900 m3 of concrete is poured at a time. This concrete must be poured consecutively and lasts the entire working day from 7.00 am to 7.00 pm. A total of 7 working days are required to pour the floors and decks. Approximately 6 trucks per hour drive up and down the construction site for these works (see Figure 2).

The first long day of concrete pouring will take place on Friday, December 22nd.

Datum
27-11--2017

Referentie

-

Project
15055 Ondergrondse
fietsenstalling kon.
Julianaplein, Den Haag, DEN
HAAG

Behandeld door
Eva Zonneveld

Blad
1 van 1

Finish off concrete

Immediately after pouring concrete the floors and decks will be finished off. A "butterfly machine" is used for this (see figure 3). It is used to compact the top layer and to adhere well to the bottom layer of the concrete. By finishing off the freshly poured concrete, the floor will be leveled and polished..



Figure. Butterfly machine

The "butterfly machine" causes a humming noise. This noise can, depending on the weather conditions, last until late in the evening, or at the latest until 11.00 pm.

Residents and entrepreneurs directly at the Koningin Julianaplein will be informed about the specific day and estimated duration of the concrete pouring one week before the other concrete works.

Summarizing

- Working period phase 1: December 2017 - March 2018
- 7 working days required for concreting of floors and decks
- 7 working days with finishing off the concrete until max. 23.00 pm
- 1st long day of concreting will take place on Friday, December 22nd.

If you have any questions about this letter, please feel free to contact me.

Sincerely,

Eva Zonneveld
Mobilis B.V